

CO₂ et Béton: la réalité



Karen Scrivener, FEng
EPFL
Switzerland



Achieving Worldwide Sustainable Construction

Karen Scrivener


Forecast growth

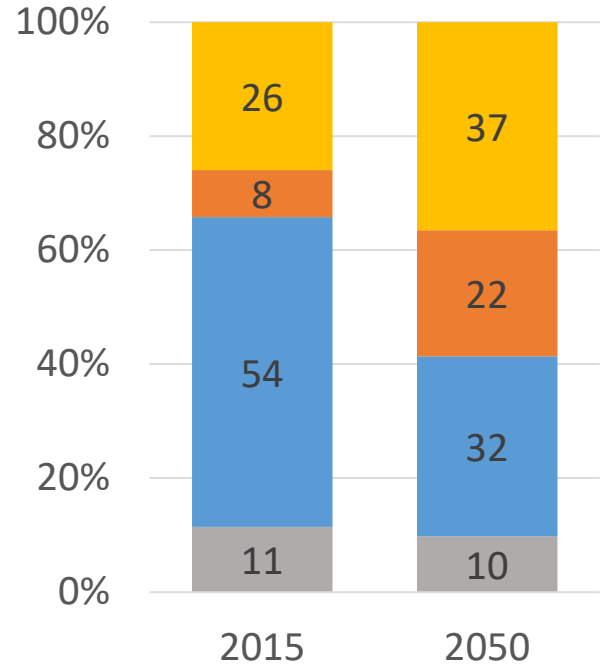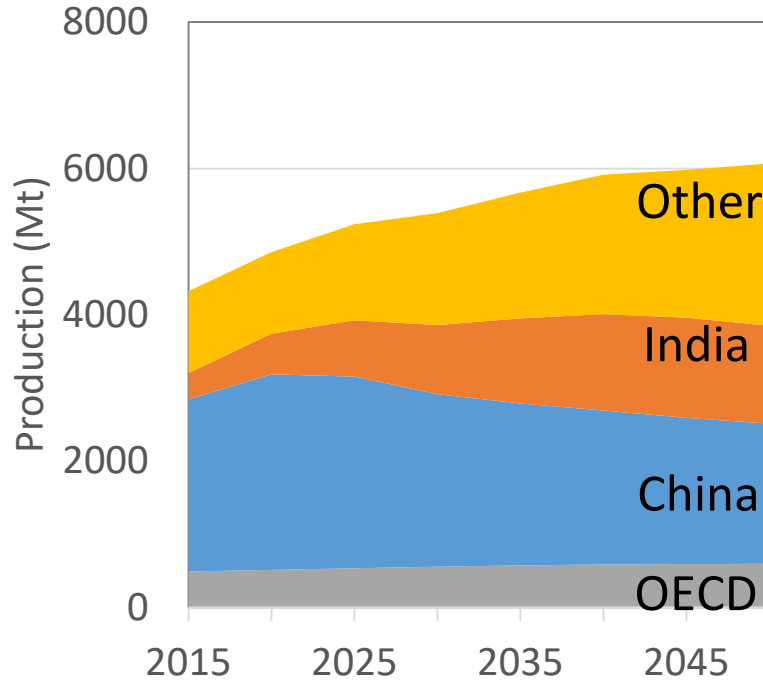

We need solutions for people in developing countries



Contribution of cement to CO₂ emissions, by country

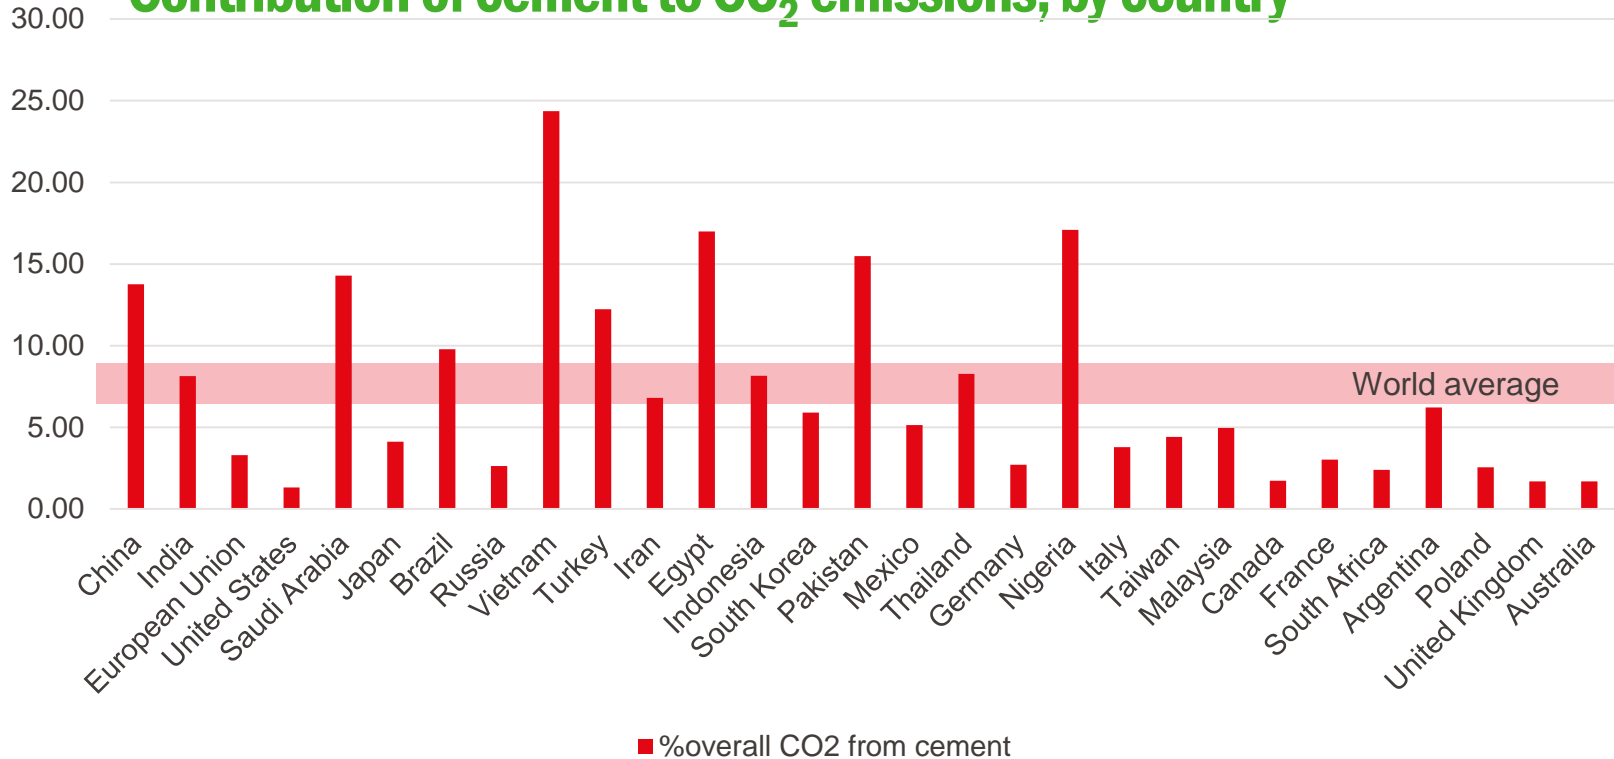

Although the USA is the third largest consumer of cement,
it accounts for < 1.5% of the country's emissions



EPFL Large contribution worldwide due to enormous volumes

Cementitious materials make up >50% of everything we produce.


It is only for this reason they account for 8% of CO₂ annually.

Low intrinsic environmental impact

To replace 25% of cementitious with timber would require planting a forest 1,5 x the size of India

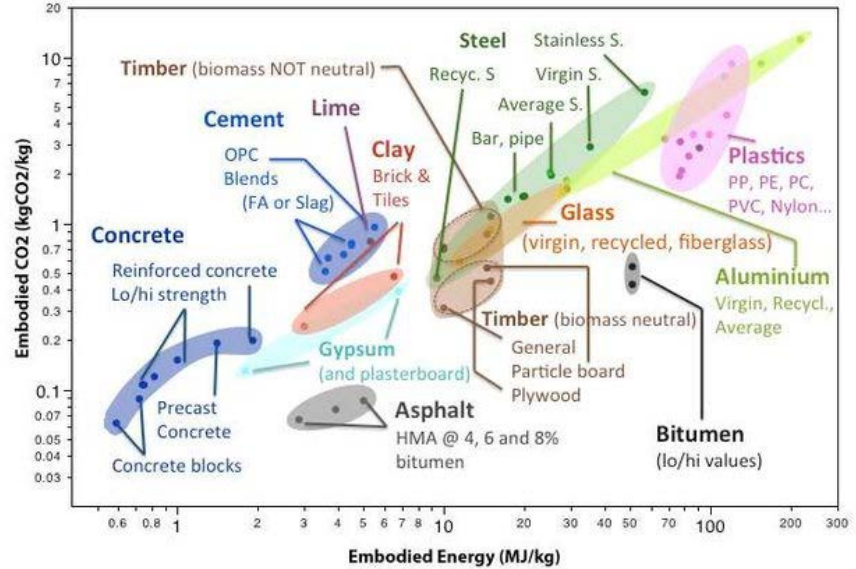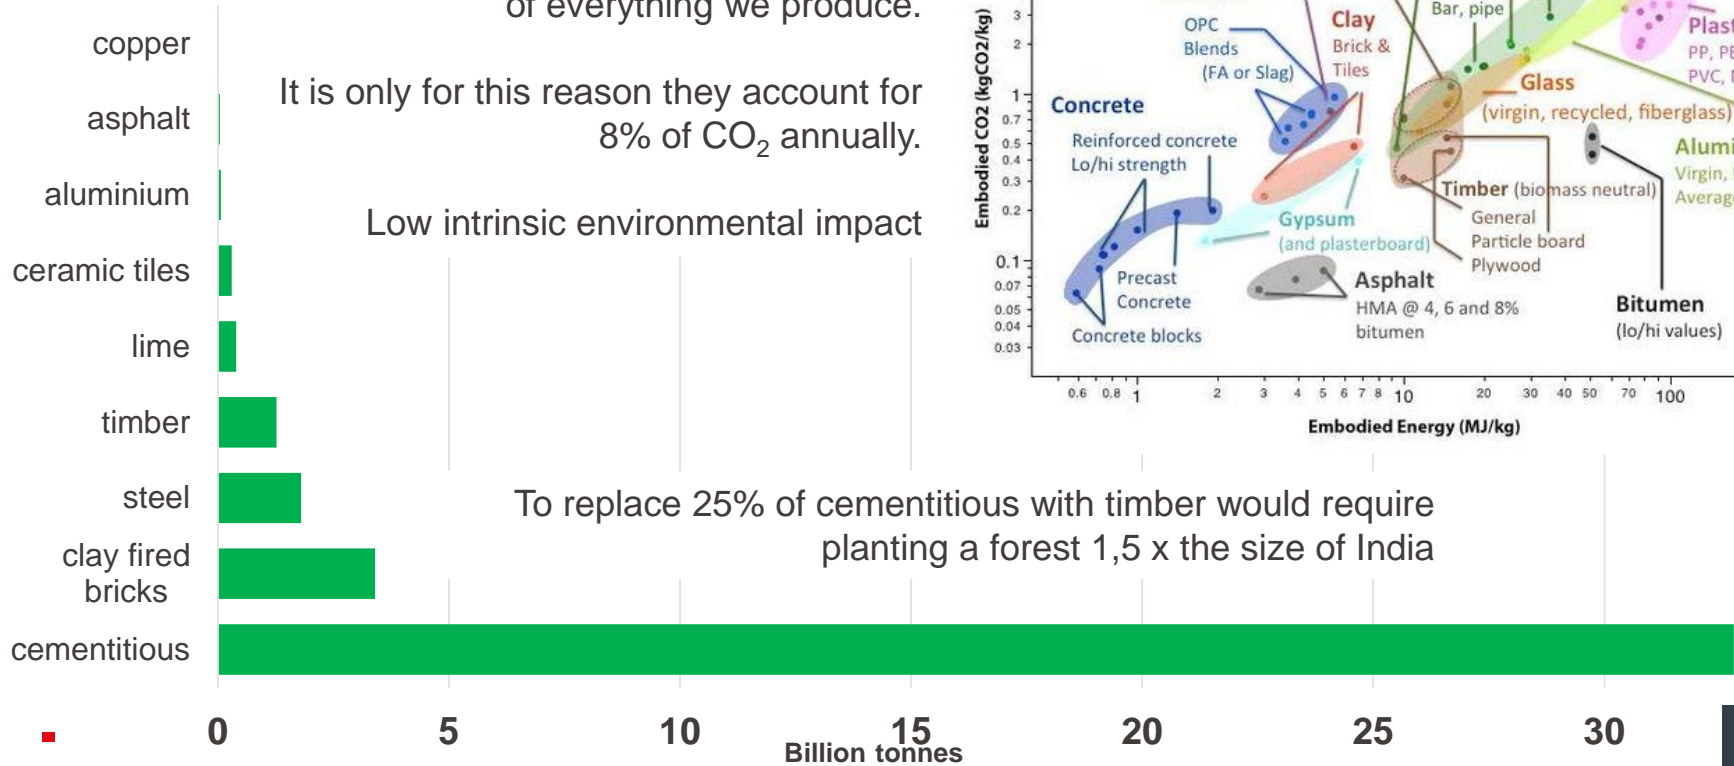


Would it help to replace concrete by other materials?

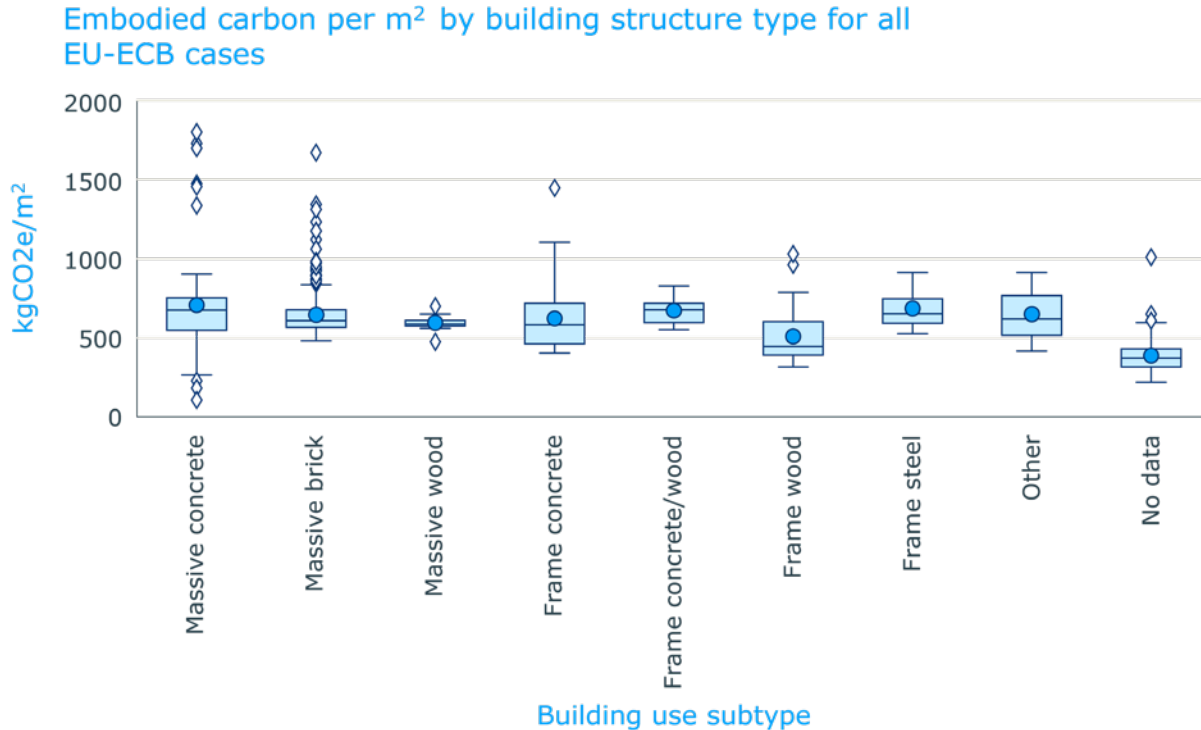

- Röck M, Sørensen A, Tozan B, Steinmann J, Le Den X, Horup L H, Birgisdottir H, Towards EU embodied carbon benchmarks for buildings – Setting the baseline: A bottom-up approach, 2022, <https://doi.org/10.5281/zenodo.5895051>.

Report for European Climate Foundation 2017

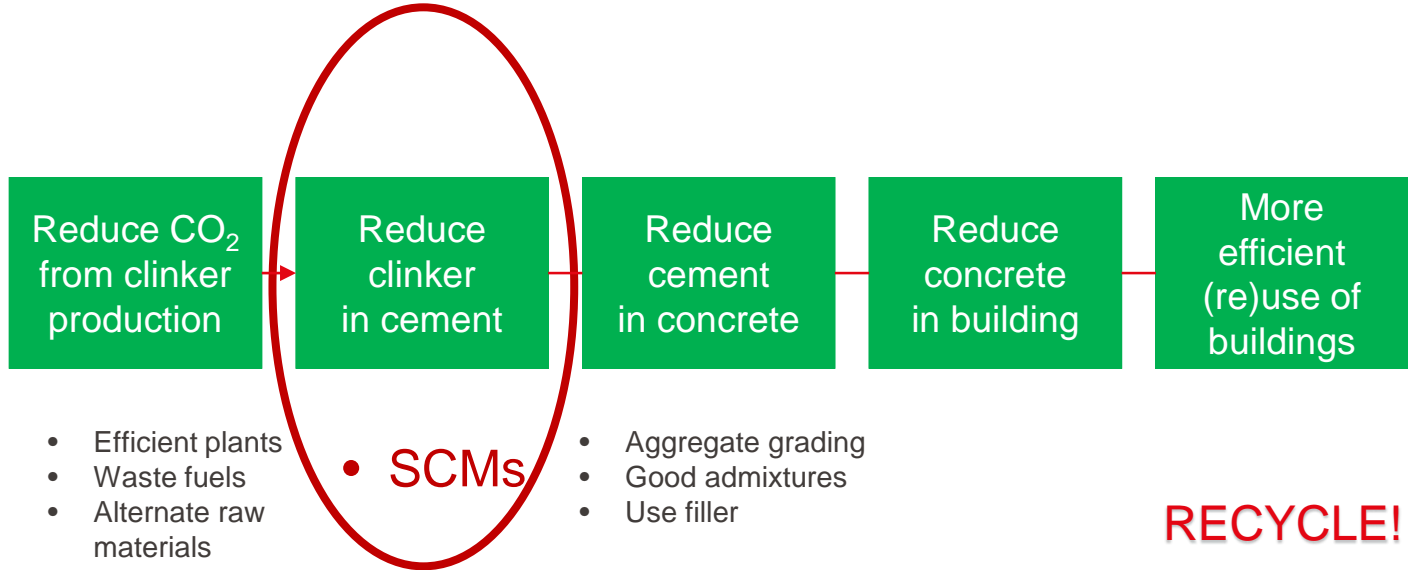


RECYCLE!

Substantial reductions in emissions > 80% can be achieved by working through the whole value chain


If only cement level is considered not more than about 50% possible without carbon capture and storage

Carbon Capture and Storage

Capture costs

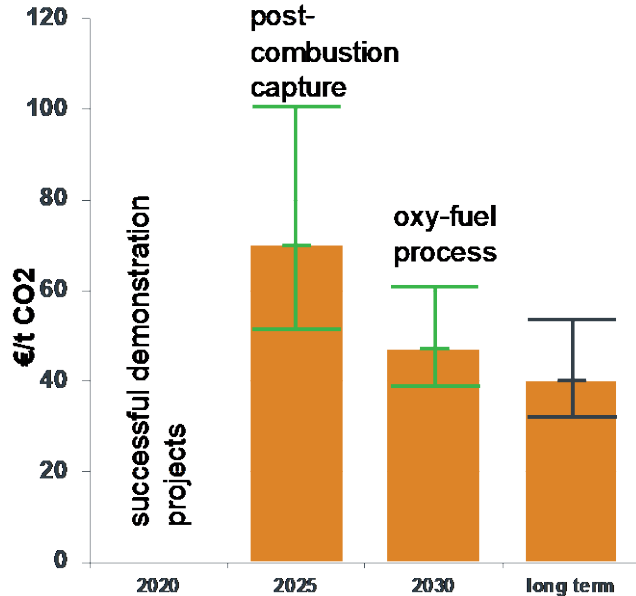

At the very least it will be expensive
 Reducing now will be a very sound investment

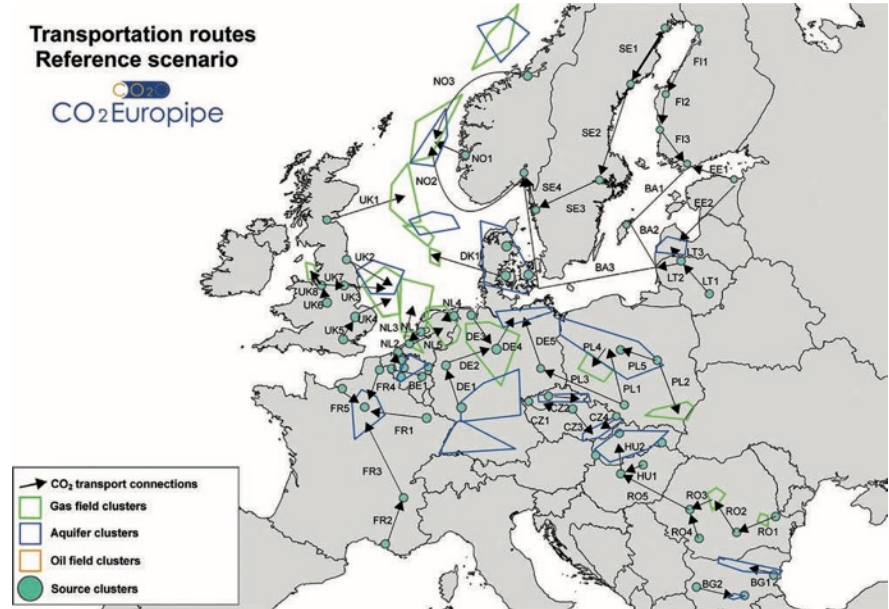

Scale of production >>> any “use” scenario
 Need to build network to transport to storage sites


Origins of CO₂ emissions in clinker production: CO₂ from the clinker remains around 90% through to the Concrete



The production process is highly optimised up to around 80% of thermodynamic limit.


It is estimated that < 2% further savings can be made here

Use of waste fuels, which can be > 80% reduces the demand for fossil fuels

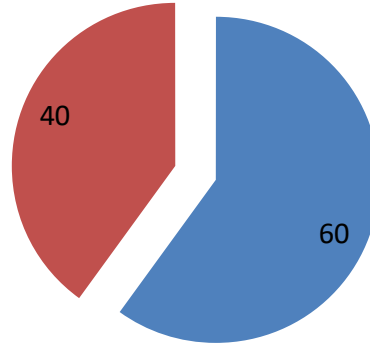


1 tonne of clinker leads to the emission of 750 – 900 kg CO₂
Average 850kg/t

- CaCO₃ decomposition (CHEMICAL)
- Fuel

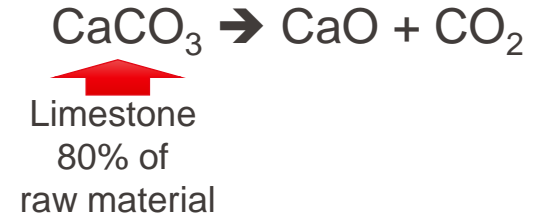


**Can we make cement with a
different chemistry?**

What is available on earth?

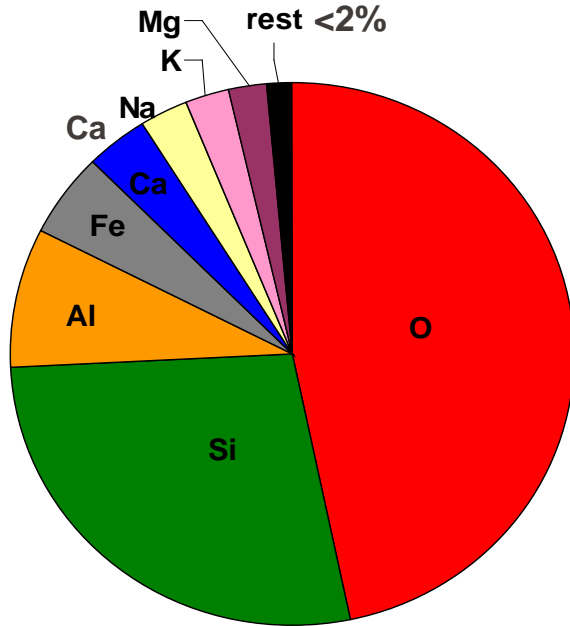

Na_2O	}	Too soluble
K_2O		
Fe_2O_3	}	Too insoluble in alkaline solutions
MgO		
CaO	}	The most useful
SiO_2		
Al_2O_3		

Hydraulic minerals in system $\text{CaO-SiO}_2\text{-Al}_2\text{O}_3$

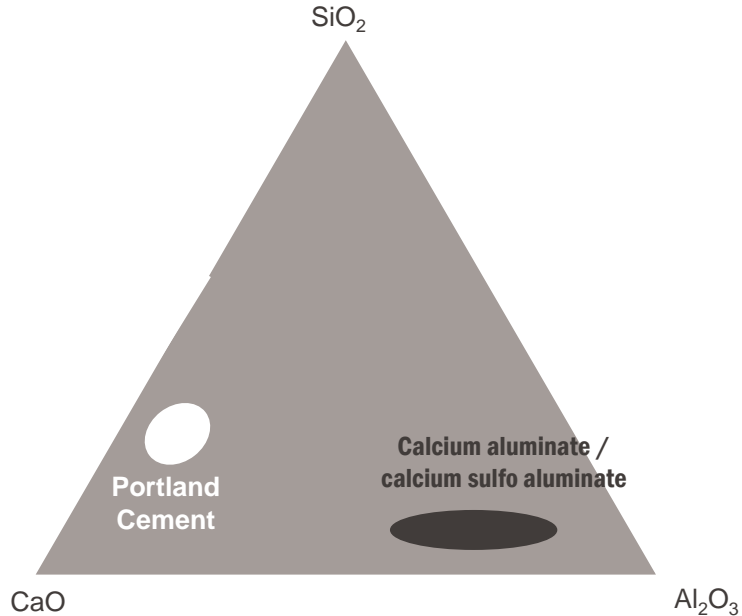

Less CaO > less CO₂

BUT, what sources of minerals are there which contain Al_2O_3 >> SiO_2 ?

Bauxite – localised, under increasing demand for Aluminium production, EXPENSIVE

Even if all current bauxite production diverted would still only replace 10-15% of current demand.

Even after nearly 50 years CSA production in China is <0.1% of OPC and falling

What does not make sense

- **Many roadmaps indicate a significant amount of future CO₂ reduction will come from “*breakthroughs*”**
- **When we consider cement is a solid material that has to come from the earth, we can see that the idea of future radical breakthroughs borders on magical thinking or alchemy**
- **People cannot live in nano or virtual houses**


- **First let’s look at a few things, much touted, with no prospect to lower atmospheric CO₂**

Biochar



- **Use as soil conditioner?**
- **Use as fuel?**
- **Use in concrete?**

The cement carbon cycle

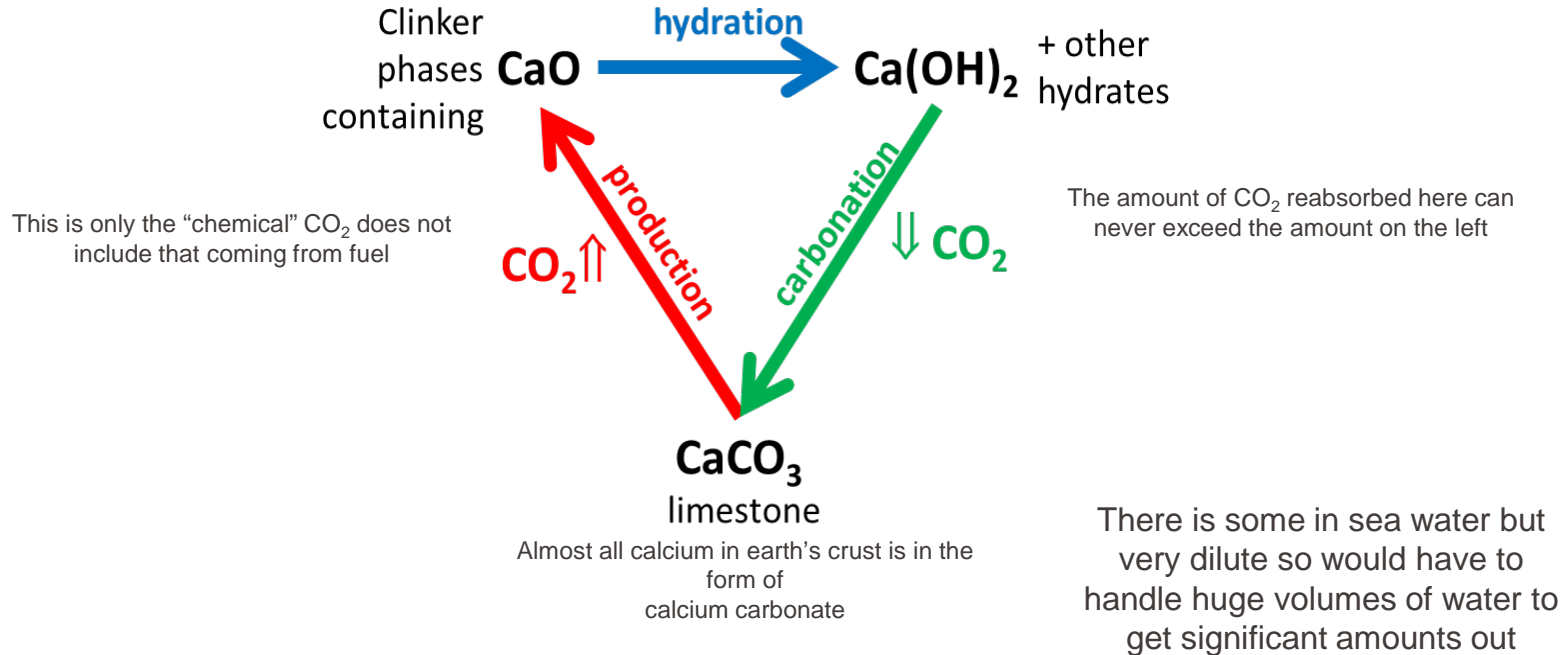


The most common fallacy:

- So of course calcium oxide, hydroxide etc can (and do) react with atmospheric CO_2 , but these would have to come from *uncarbonated* sources of CO_2 to have any net benefit
- Microorganisms (algae, bacteria, etc) *can* form calcium carbonate from atmospheric CO_2 , but they need a source of calcium.
Again only if this was originally uncarbonated does it have any net benefit
- Any *uncarbonated* sources of calcium can already be simply exploited to produce conventional clinker.

Portland based cements will continue to dominate

Blended cements are the most realistic option to reduce CO₂
and extend resources

Most promising approach - reducing the clinker factor

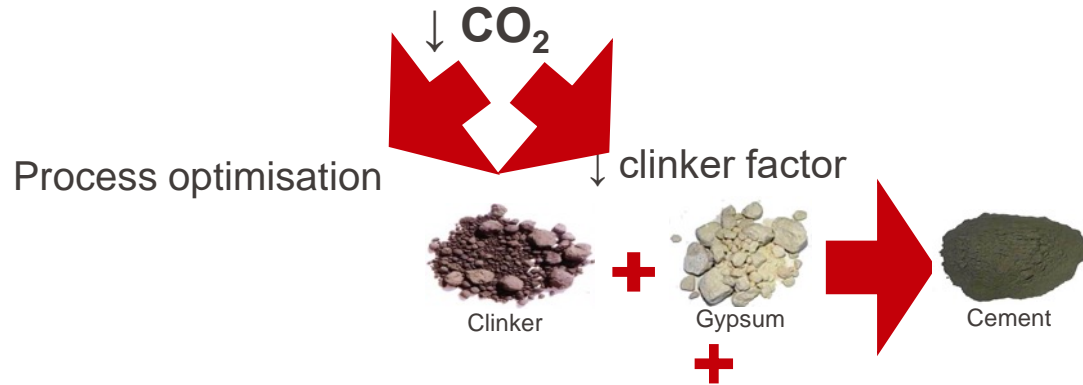

SCMs – Supplementary Cementitious Materials



Limestone



Fly ash



Slag



Calcined clays



Burnt Oil Shale




Recycled concrete fines

Often by-products or wastes from other industries



Availability of SCMs

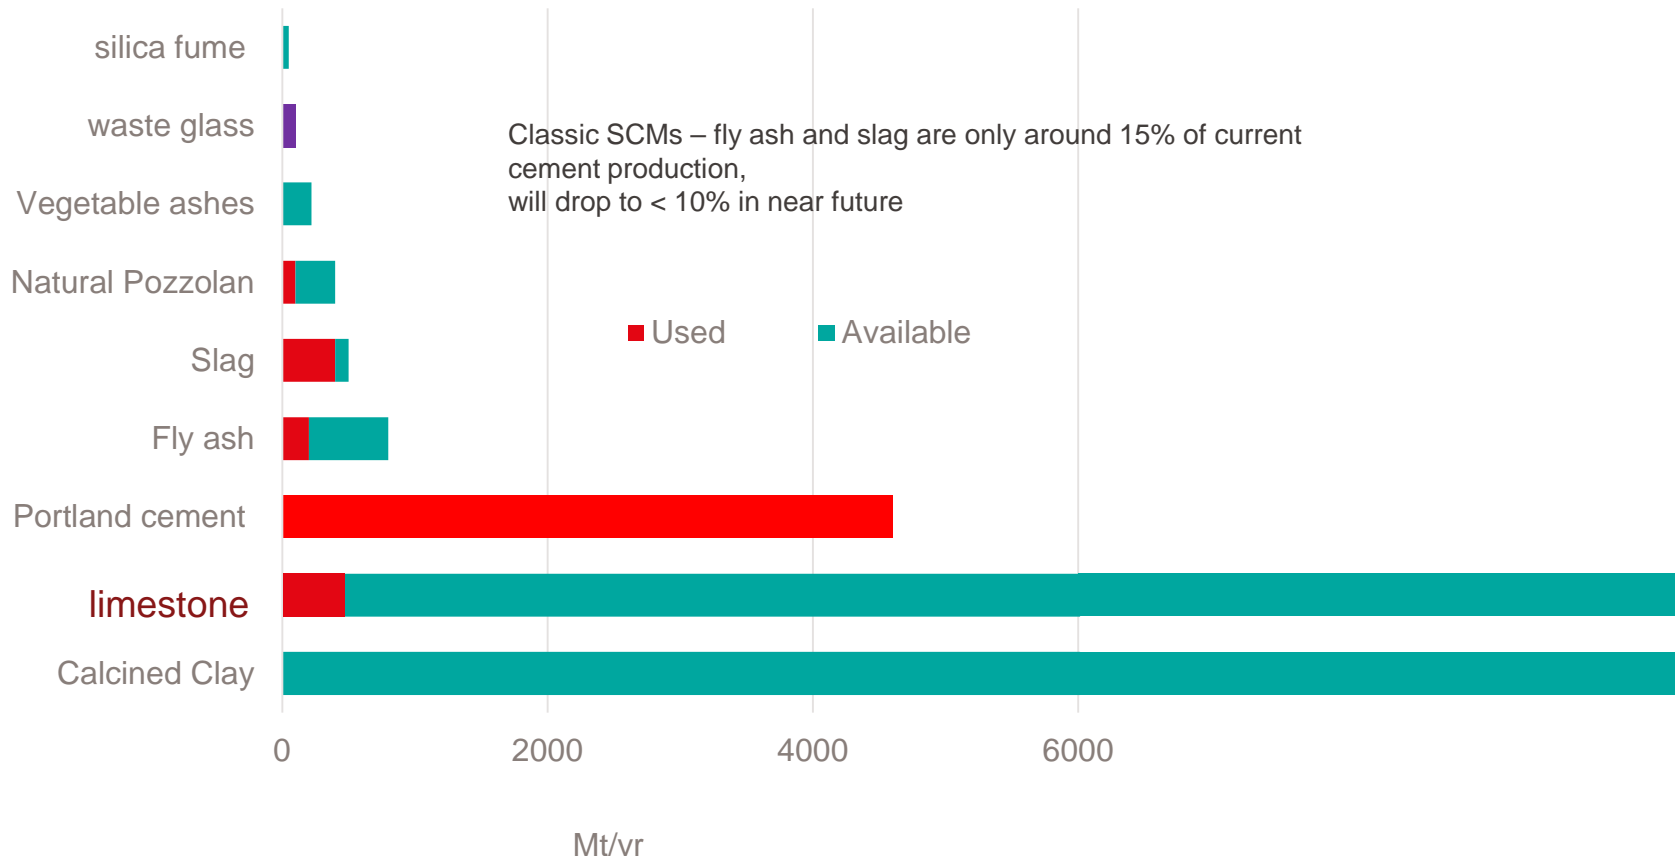

There is no magic solution

- **Blended with SCMs will be best solution for sustainable cements for foreseeable future**
- **Only material really potentially available in viable quantities is calcined clay.**
- **Synergetic reaction of calcined clay and limestone allows high levels of substitution:**

EPFL led LC³ project supported by SDC. Started 2013




Schweizerische Eidgenossenschaft
Confédération suisse
Confederazione Svizzera
Confederaziun svizra

Swiss Agency for Development
and Cooperation SDC


Limestone
Calcined
Clay
Cement

The logo for Limestone Calcined Clay Cement (LC3), consisting of the letters 'LC' in a large, bold, green font, followed by a smaller '3' in a dark blue font.

What is LC³

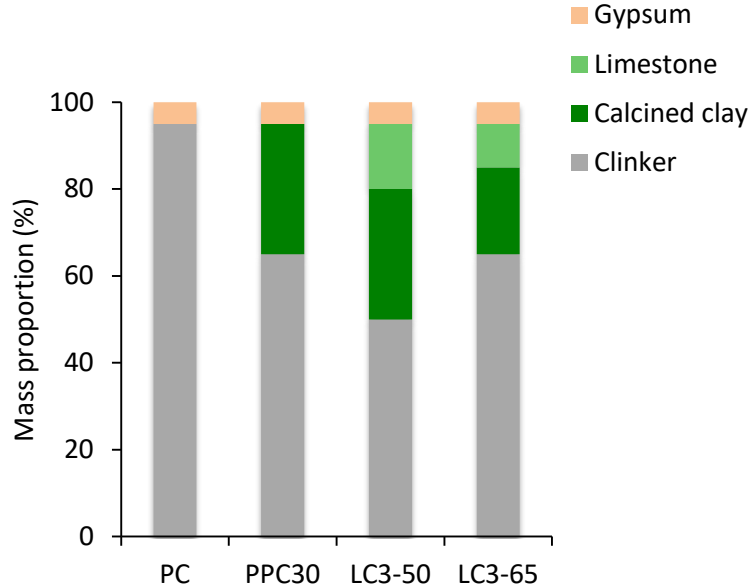


LC³ is a family of cements, the figure refers to the **clinker** content

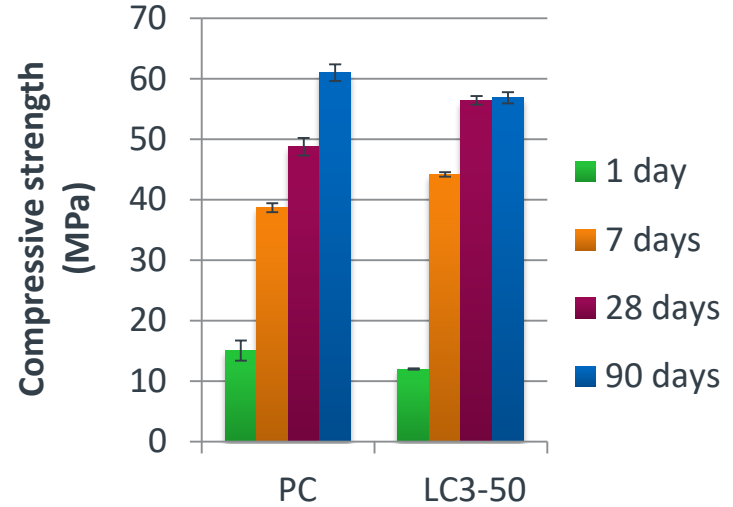

- 50% less clinker
- 40% less CO₂
- Similar strength
- Better chloride resistance
- Resistant to alkali silica reaction


Comparison of calcined kaolinitic clay, slag and fly ash

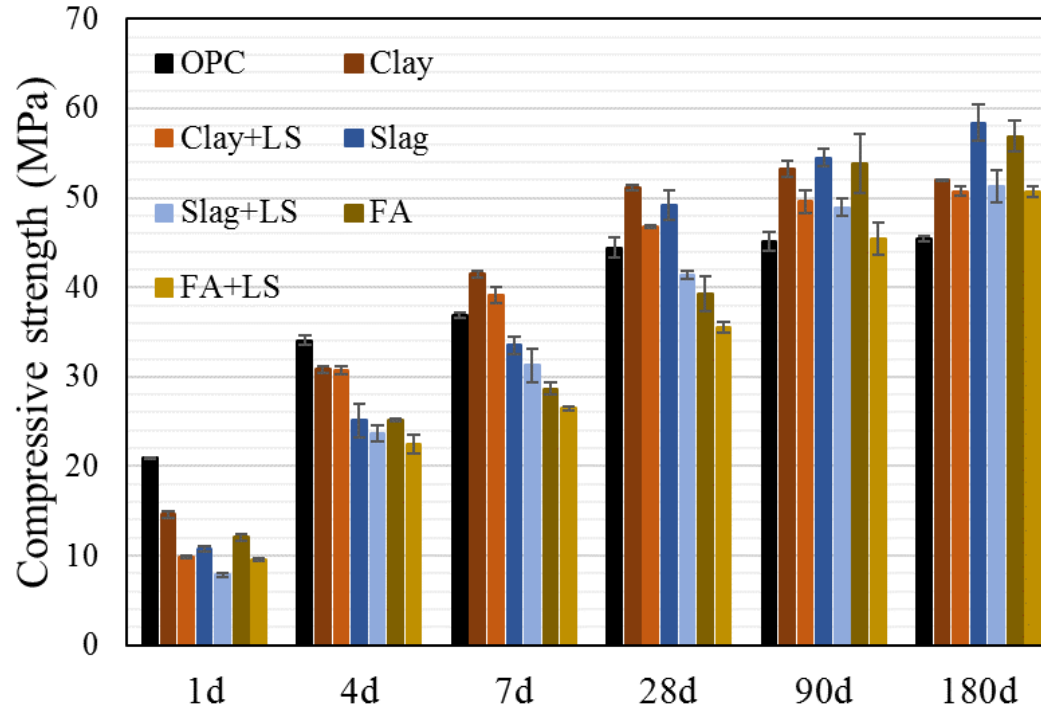

Binary systems 70% clinker, 30% SCM

Ternary systems, with limestone 50% clinker, 30% SCM, 15% limestone

Three basic clay structures

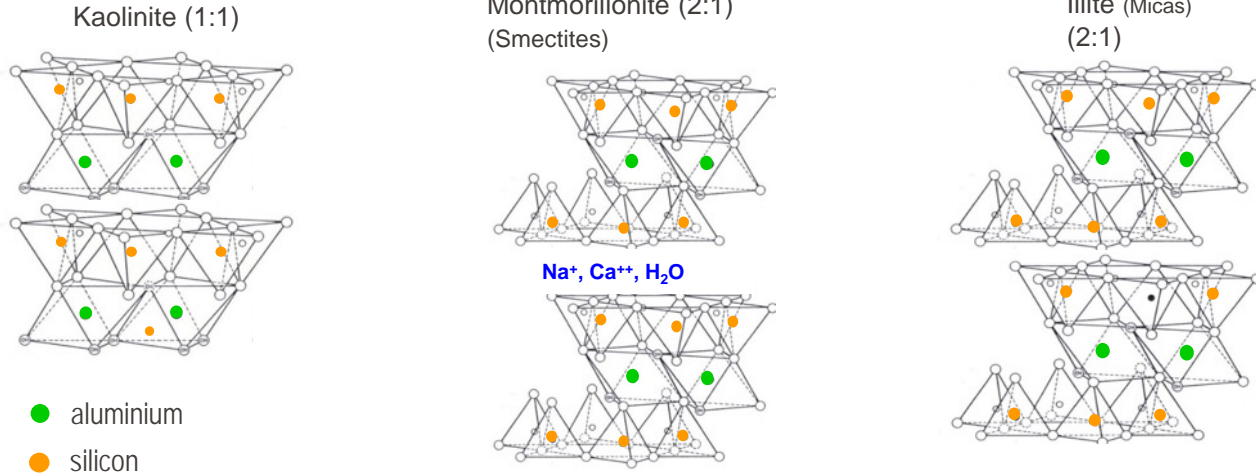



“Metakaolin”, sold as high purity product for paper, ceramic, refractory industries
Requirements for purity, colour, etc, mean expensive 3-4x price cement

Clays containing metakaolin available as wastes
– over or under burden NOT agricultural soil

- *Much much less expensive often available close to cement plants*


Over 70 clays studied from around the world

Different calcination conditions
 Different compositions, impurities
 Different physical properties

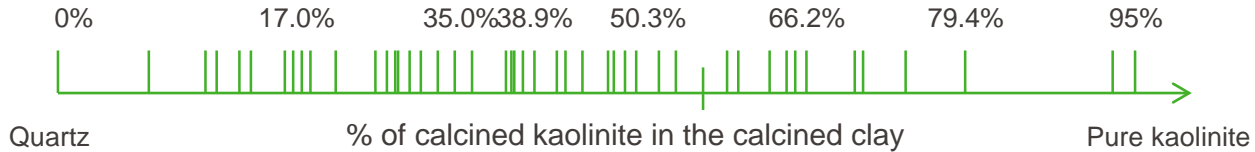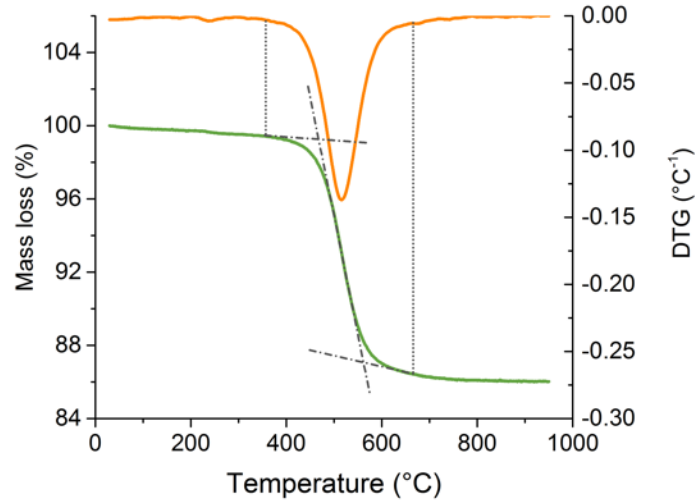

Benchmark test of clay strength

- **Compressive strength EN 196-1 at 1, 3, 7, 28, 90 d**
- **Linear increase of strength with the MK content of calcined clays**
- **Similar strength to PC for blends containing 40% of calcined kaolinite from 7d onwards**
- **At 28 and 90 days, little additional benefit >60%**
- **Minor impacts of fineness, specific surface and secondary phases**

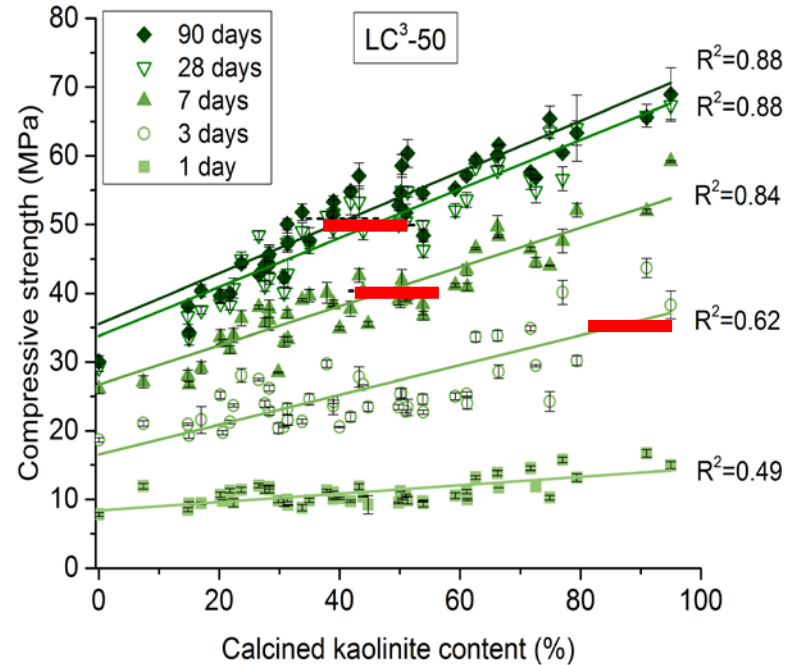


Calcined kaolinite content overwhelming parameter

Distribution of Kaolinitic clays

Ito and Wagal, Scientific data 2017

0-5m

>5m

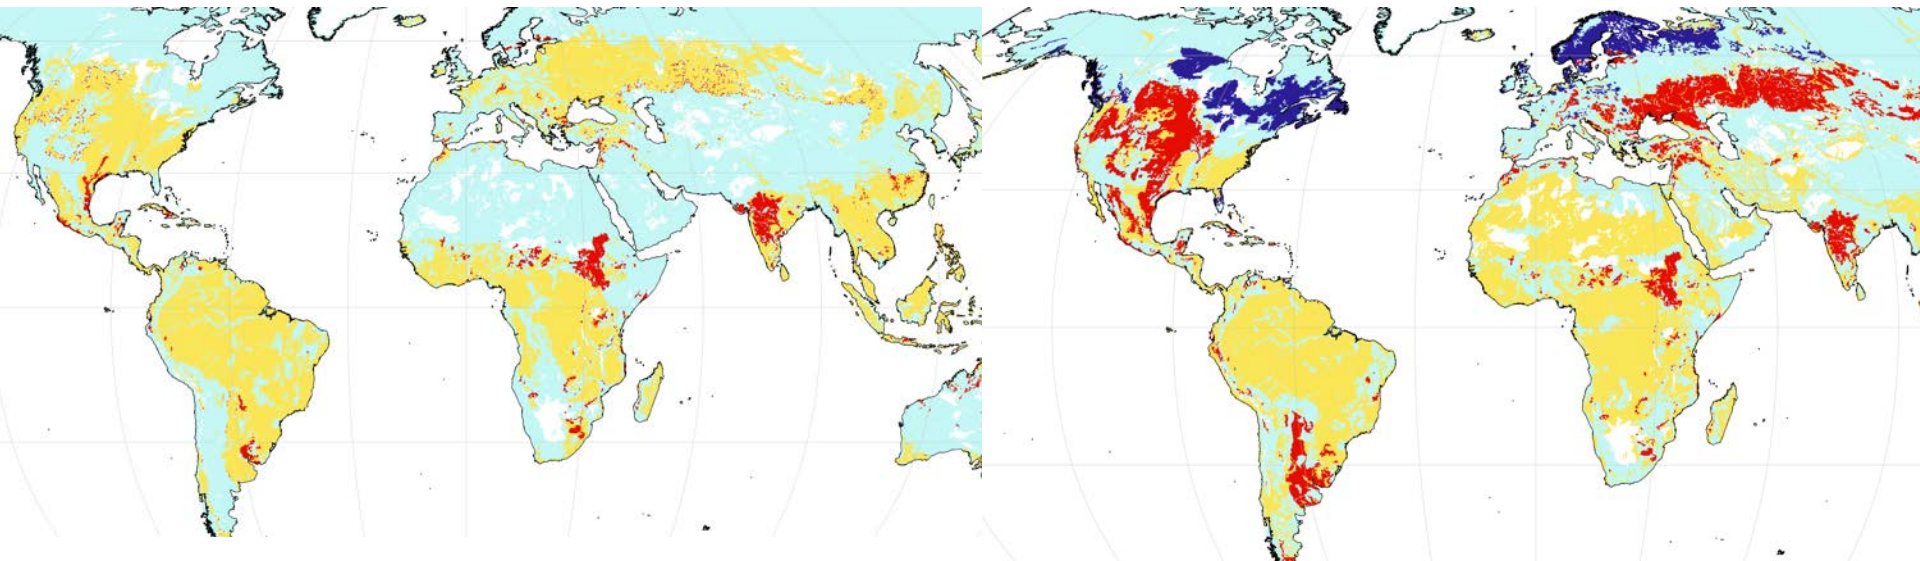


Illite/mica

Kaolinite

Smectite

Vermiculite

EPFL **Is there clay in Switzerland?**

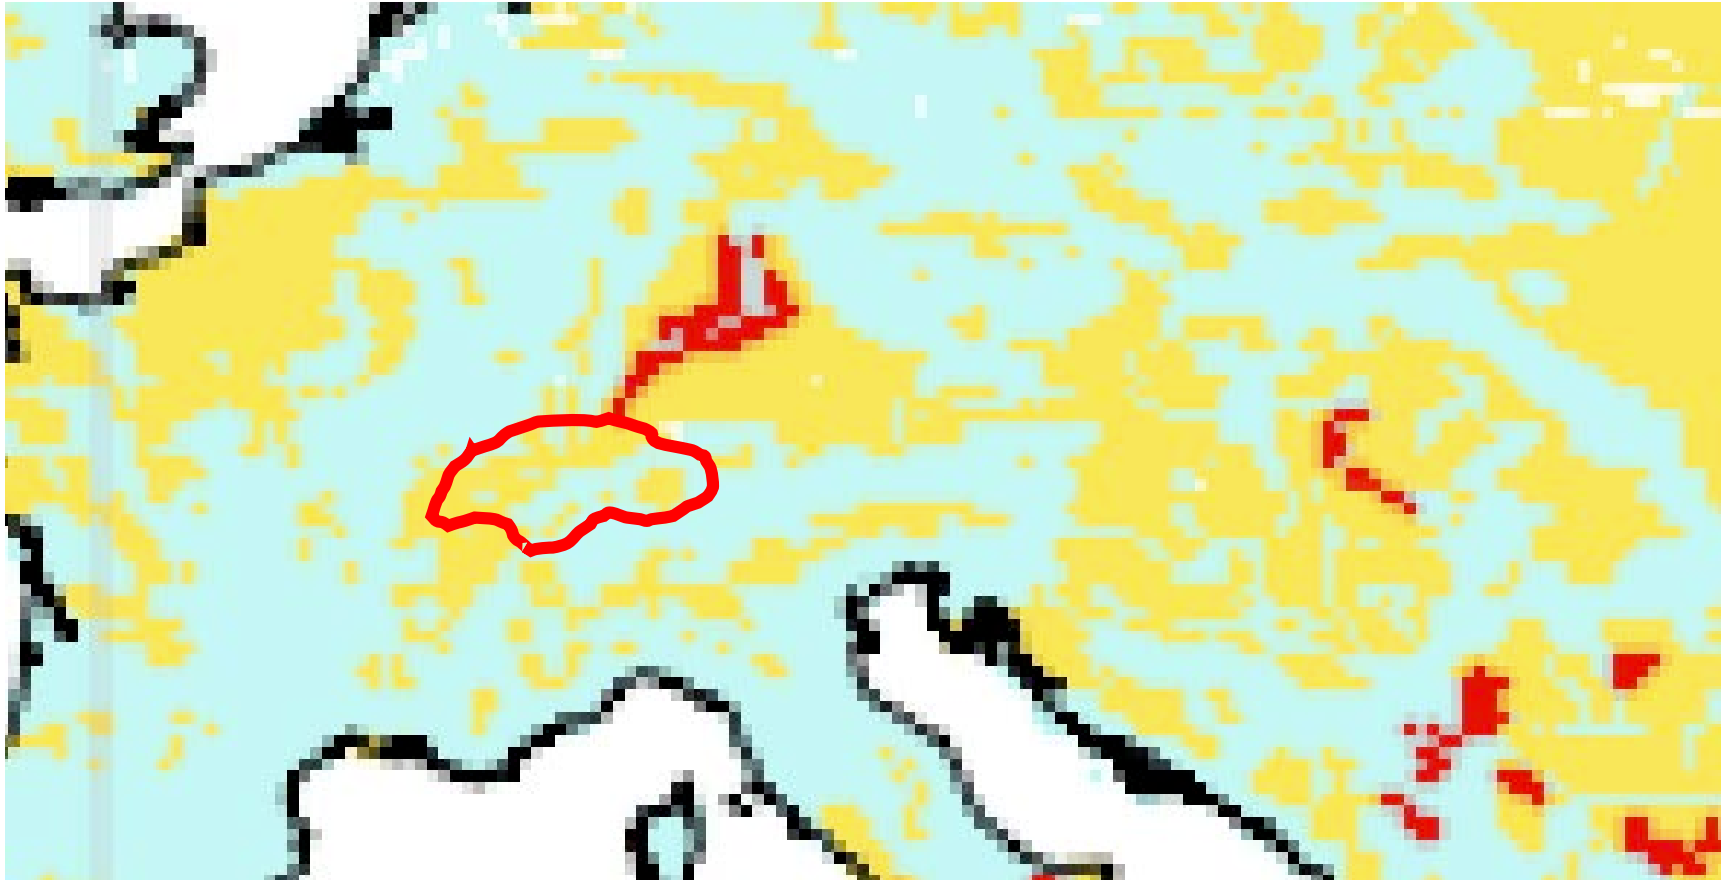

Calcination of clay

Can be achieved with existing technology:

Rotary kilns (even clinker kilns)

Flash Calciners

CO₂ emission as low as **90** kg /tonne

Possible to electrify

Demonstration structure, India



Around 14 tonnes of CO₂ saved
Compared to existing solutions




New Calcination plant Ivory Coast





Colour control at Ivory Coast plant




Calcined Clay only SCM which can expand substitution

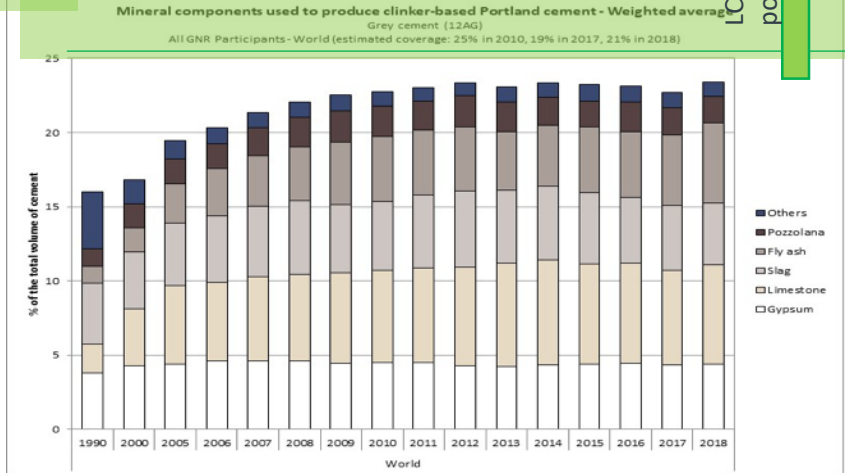

Substantial reductions in emissions ~80% could be achieved by working through the whole value chain

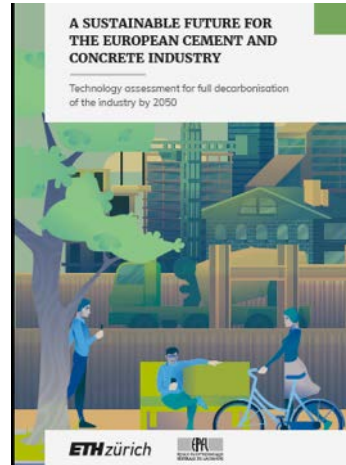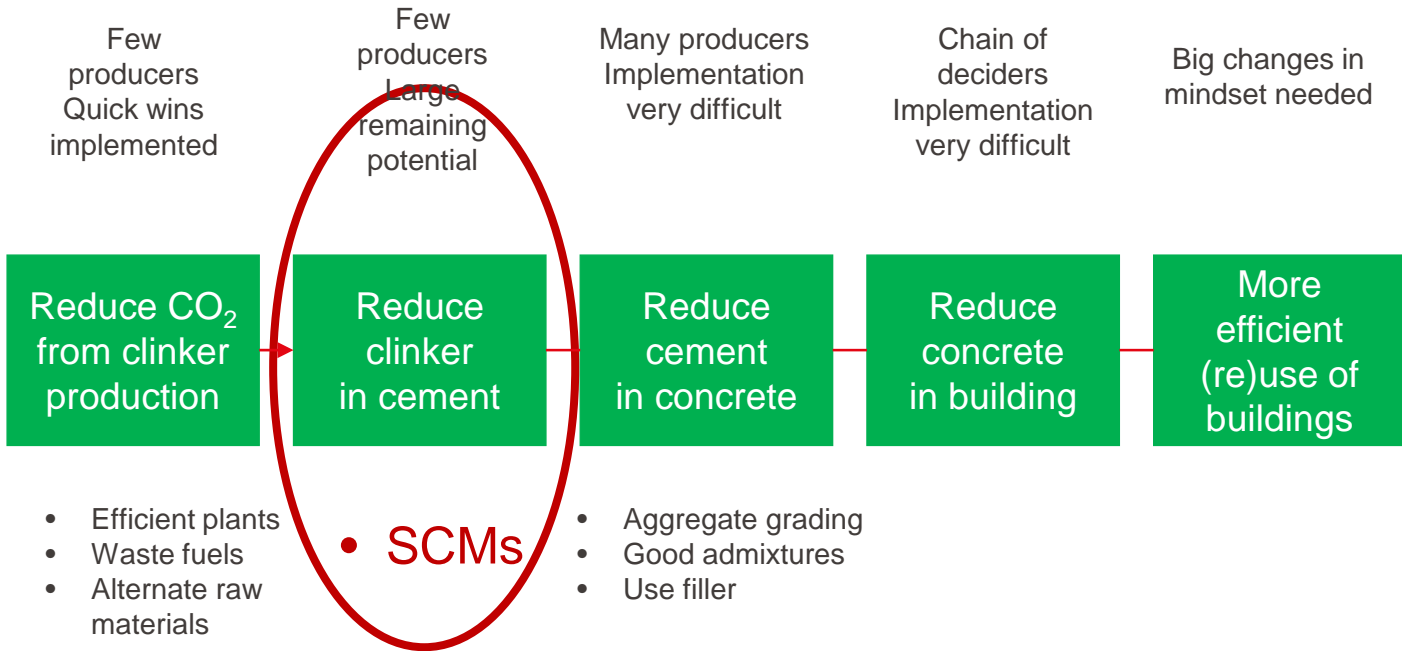

Efficiency of binder use (29 countries)

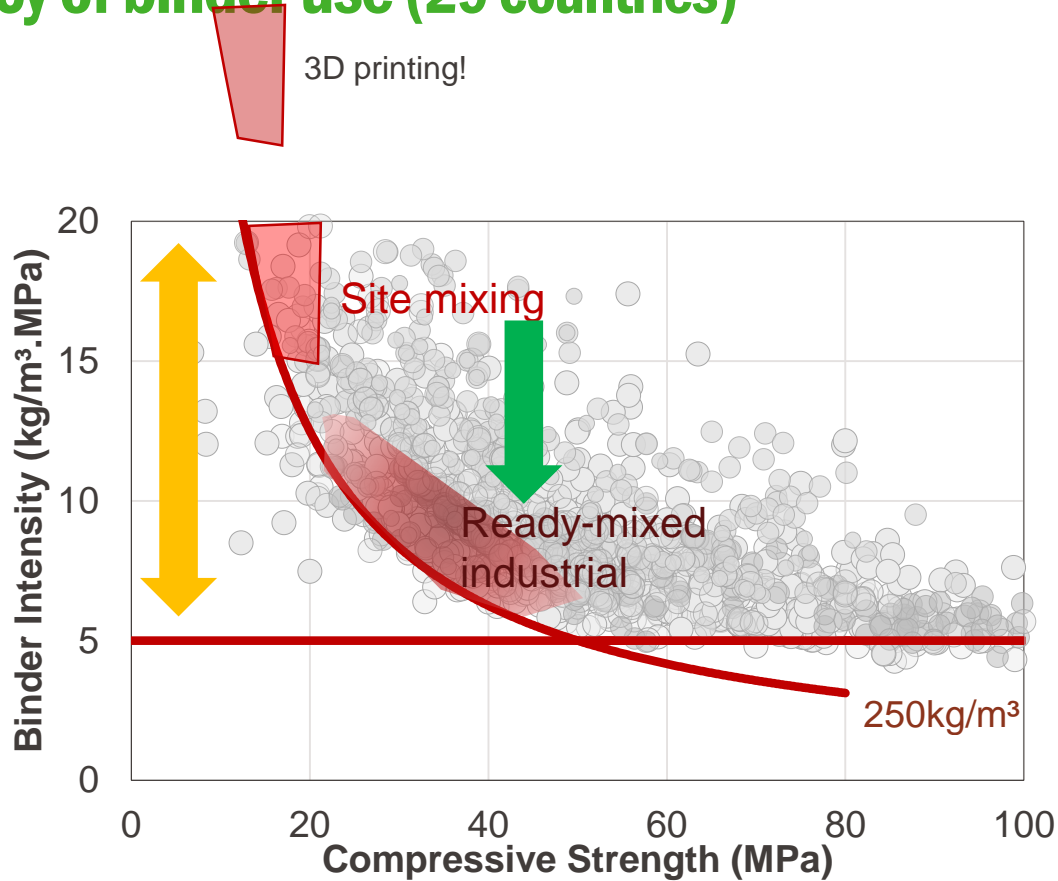



DAMINELI, et al.
Measuring the
eco-efficiency of
cement use.
**Cement and
Concrete
Composites**, 32,
p. 555-562, 2010

Concluding remarks

- **Substantial reductions in CO₂ possible**
 - **At cement level by increasing SCM substitution**
 - **At concrete level by minimising cement content**
 - **At structure level ?**
- **All of the above will also lower cost**
- **Remainder CO₂ can only be dealt with by carbon capture and storage high cost, infrastructure not in place.**
- **Calcined clays are the only realistic option for extending the use SCMs**
- **Can be done FAST and at SCALE**

The GLOBE Consensus: A paradigm shift

Unprecedented, more holistic approaches based on scientific background

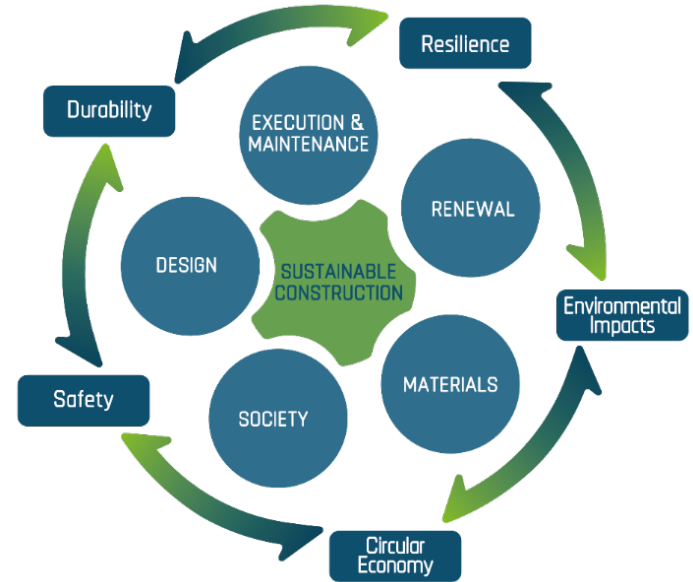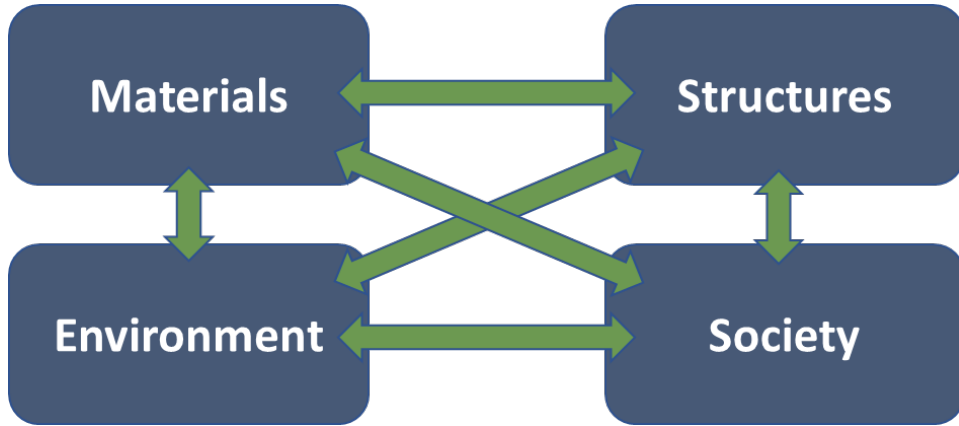



<http://globe.rilem.net>



Thank You

Karen Scrivener

Lower cost: Cementis study

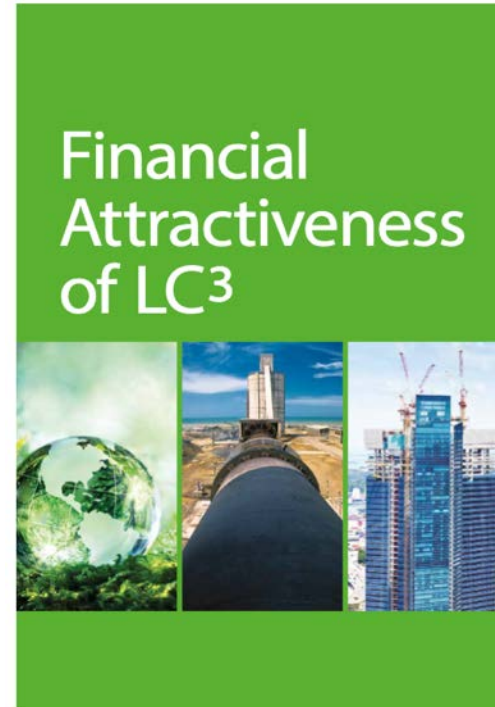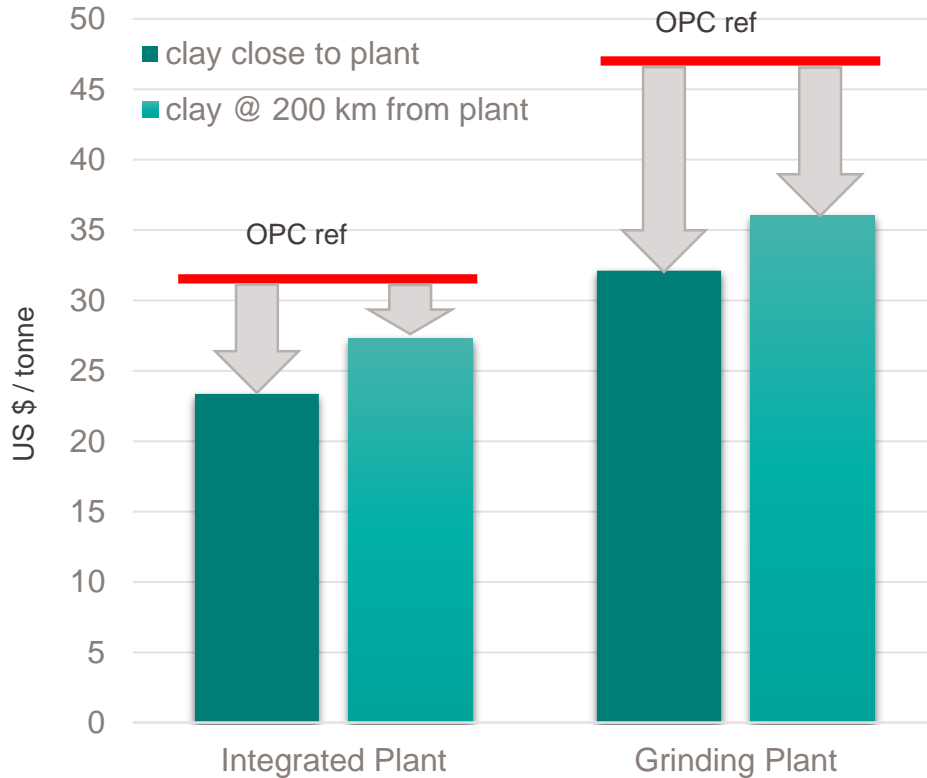

Report available:

<https://lc3.ch/wp-content/uploads/2020/10/2019-LC3FinancialAttractiveness-WEB.pdf>

